


WALL-MOUNTED**RAPID DRY****BLOWER / DRYER**

Rapid Dry blower assembly

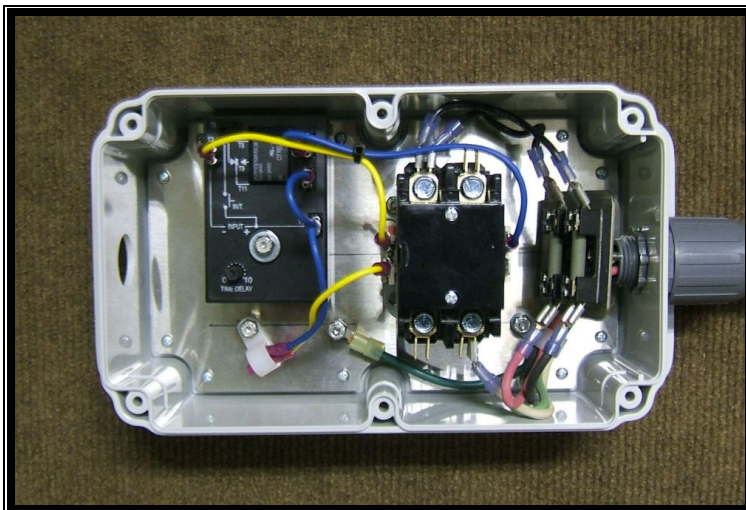

Inside view of electrical enclosure

Two Models to Choose From:**Model 400000**

- 110-120 Volts / 22.0 amps
- 216 CFM
- 314 MPH Nozzle Velocity

Model 400500

- 220-240 Volts / 13.0 amps
- 221 CFM
- 322 MPH Nozzle Velocity

Standard Features:

- Warm Air Blower / Dryer
- Stainless Steel Construction
- Polycarbonate NEMA Rated Electrical Enclosure
- 24 VAC (0.25 - 5 second) Adjustable Delay-Start Relay
- Two Thru-Flow Cooled Blower Motors
- Fuse Protected Motors
- 2.0 inch (O.D.) Blower Outlet
- 2.0 inch (I.D.) x 3 ft. (Long) Blower Outlet Hose
- 1.5 inch (I.D.) x 15 ft. (Long) Blower Hose
- Stainless Steel Blower Nozzle

DOES NOT INCLUDE A HOSE BOOM**Dimensions:**

Blower Unit

12" Wide x 22" Tall x 9" Deep

Electrical Enclosure

10" Wide x 5" Tall x 3½" Deep

Weight:

Approximately 35 lbs.